

TECHNICAL SUMMARY


Recommended Minimum Centers—.050 (1.27)
 Current Rating—3 amps continuous
 Recommended Working Travel—.050 (1.27)
 Spring Force—1.3 oz. @ .050 (1.27) travel

MATERIALS

Contact Barrel—Nickel/silver
 Spring—Stainless steel, gold plated
 Plunger—Full-hard beryllium copper, gold plated
 Special Features—Press ring

HOW TO ORDER

100803-00

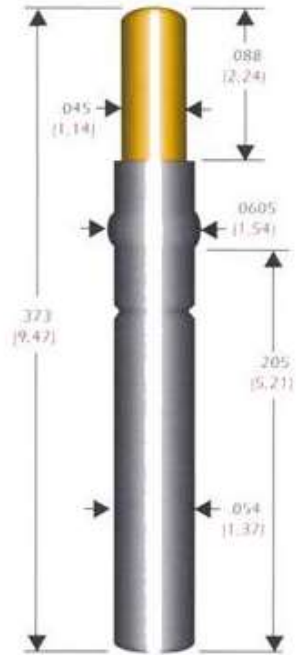

TECHNICAL SUMMARY

Recommended Minimum Centers—.100 (2.54)
 Current Rating—3 amps continuous
 Recommended Working Travel—.050 (1.27)
 Spring Force—2.2 oz. @ .050 (1.27) travel

MATERIALS

Contact Barrel—Nickel/silver
 Spring—Stainless steel, gold plated
 Plunger—Full-hard beryllium copper, gold plated
 Special Features—Press ring

HOW TO ORDER

100737-01